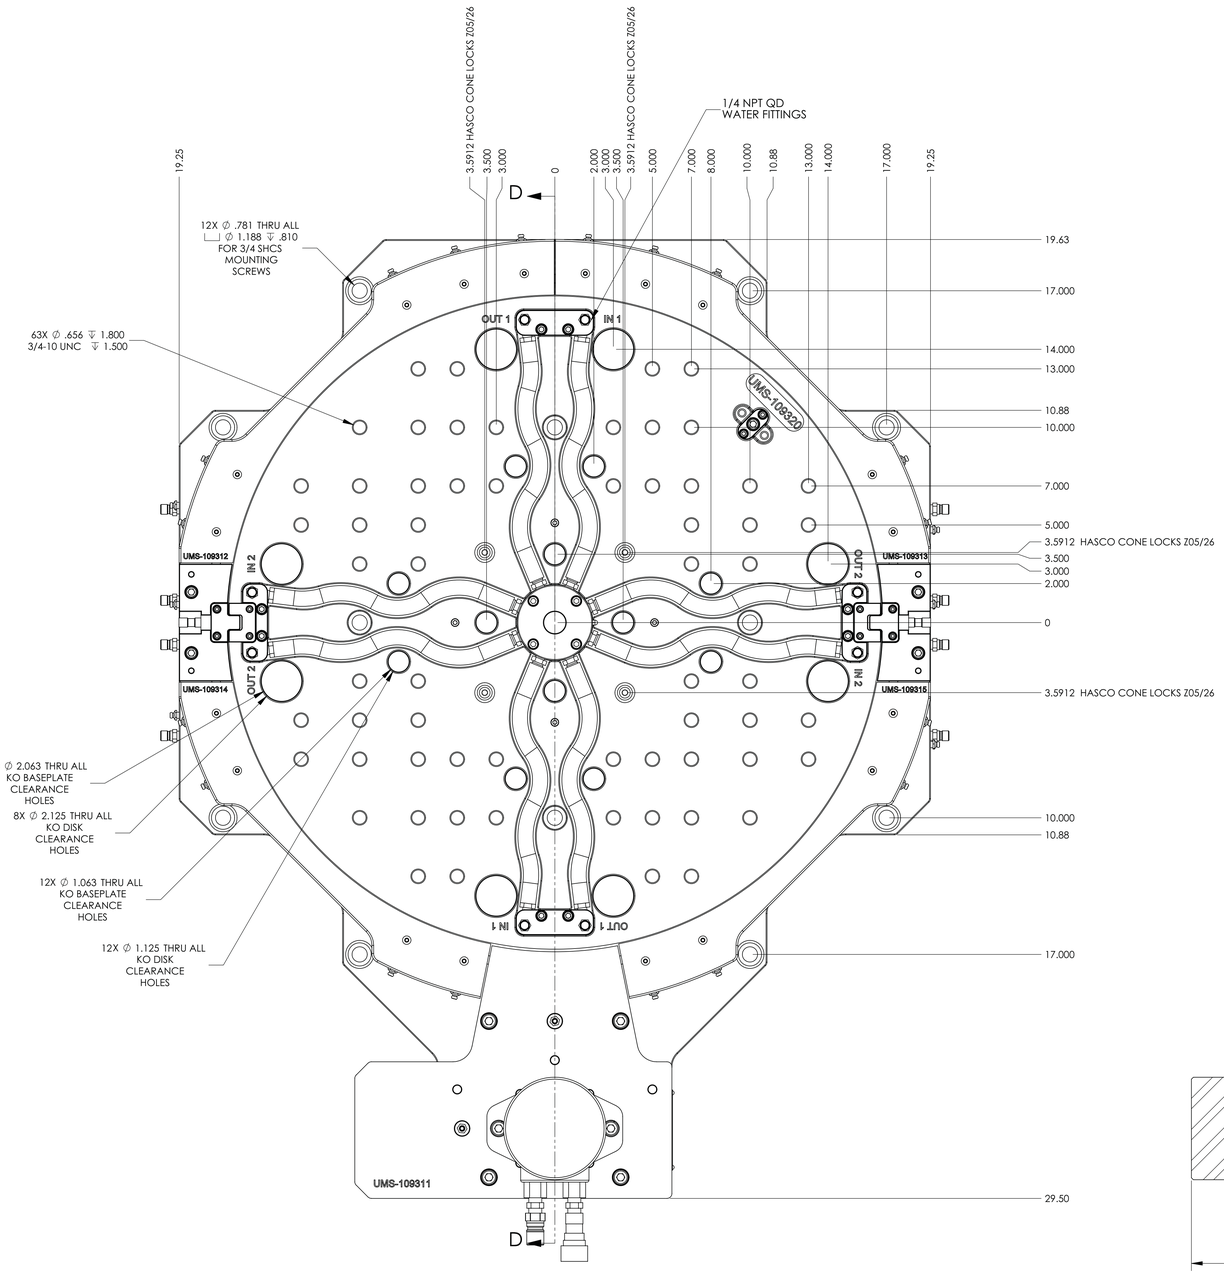

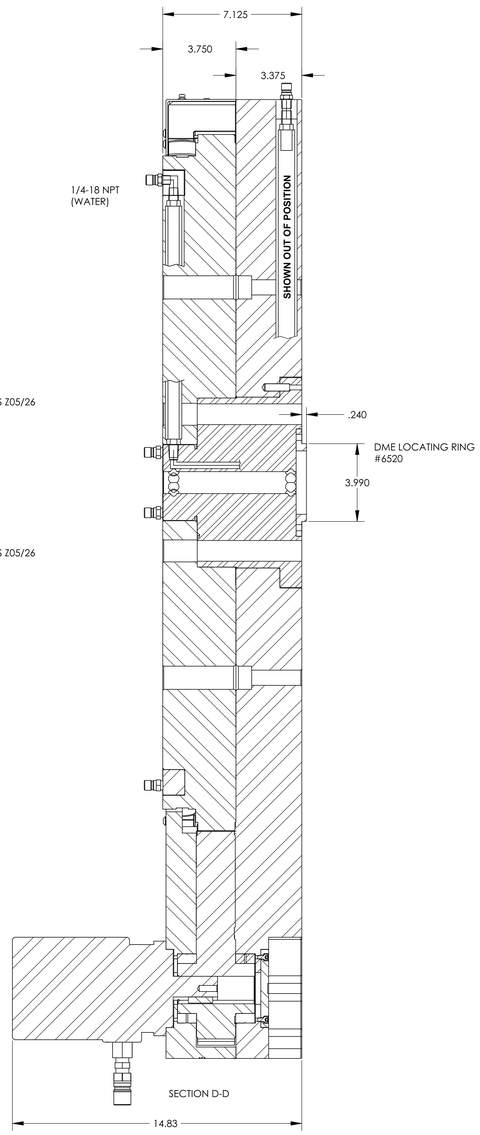

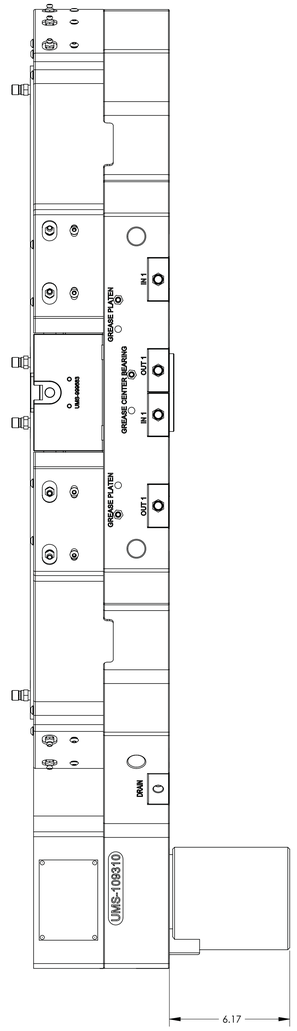

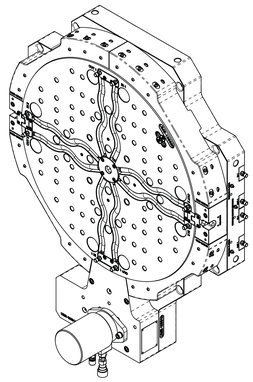

STANDARD MOTOR MOUNTING POSITION

REAR MOUNTED MOTOR POSITION

NOTE:
STANDARD MOUNTING POSITION FOR ALL UMS TURNTABLE MODELS IS WITH HYDRAULIC DRIVE LOCATED IN THE 6:O'CLOCK POSITION. HYDRAULIC MOTOR CAN BE MOUNTED ON EITHER FRONT OR BACK OF TURNTABLE AND IS EASILY CHANGED.

OPTIONAL TURNTABLE MOUNTING POSITIONS ARE POSSIBLE BUT MAY REQUIRE LONGER HYDRAULIC HOSES AND SENSOR CONNECTIONS AND MAY ALSO REQUIRE MODIFICATION OF EXISTING MACHINE GUARDS, COVERS AND SAFETY INTERLOCK SYSTEMS.

APPROVAL PRINT REFERENCES ARE TO

MODEL # _____

SERIAL #_____

PLEASE CHECK PRINT DIMENSIONS
CAREFULLY. NOTE AND INITIAL
ANY CHANGES OR CORRECTIONS
PROMPT RETURN EXPEDITES
DELIVERY OF YOUR ORDER.

APPD. BY _____DATE_____

PROPRIETARY & CONFIDENTIAL
This is proprietary and confidential material which is the sole property of MGS MFG. GROUP, W188 N11701 Maple Road, Germantown, WI 53022 and may not, under any circumstance, be reproduced or converted for any other use without the express written approval of MGS MFG. GROUP.

TOLERANCES AND DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN ACCORDANCE WITH ASME Y14.5M - 1994 STANDARDS
DIMENSIONS ARE IN INCHES
1 = ±.05
.01 = ±.01
.001 = ±.005
.0001 = ±.0005
Angles = ±1°
THIRD ANGLE

MGS MFG. GROUP
ENGINEERING FOR OPTIMUM PERFORMANCE
W188 N11701 Maple Rd. Germantown, WI 53022 Phone: (262) 255-5790

Description:	**850MM HYDRO Customer Approval Drawing**
Material:	**SEE PART PRINTS**
Drawn By:	**G GIBBONS**
Drawn Date:	**5/1/2007**
Scale: **1:3**	Rev. **- - -**
Used on	**850 MM HYDRO SPI**

Last saved by: gibbonsg
Last saved on: Wednesday, June 25, 2008 9:10:47 AM